

**AXR®8** is dedicated to applications requiring a very good level of chemical and heat resistance in addition to a perfect printing quality and excellent mechanical resistances.


The ink provides excellent print quality of all types of barcodes, very small text, large characters and logos, at a blackness up to 1.8 (ODR).

The ribbon structure allows printing on many kinds of synthetics (PVC, PET, PE, PP) and on various matt and glossy coated papers.

The printed image offers an excellent smudge and scratch resistance, very good heat resistance, up to 250°C and very good resistance to various solvents.


Those characteristics remain at speeds up to 200 mm/s (8 ips) and with 200, 300 and 600 DPI printheads, making this ribbon perfectly adapted to the durable labeling market.


AXR<sup>®</sup>8 grade features ARMOR's outstanding backcoat technology, ensuring excellent printhead protection, preventing clogging and static build-up.

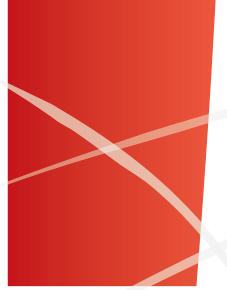

# • EXCELLENT RESISTANCE TO SOLVENTS AND TO HIGH TEMPERATURE

- **EXCELLENT RESISTANCE TO SMUDGE AND SCRATCH**
- EXCELLENT PRINTING QUALITY

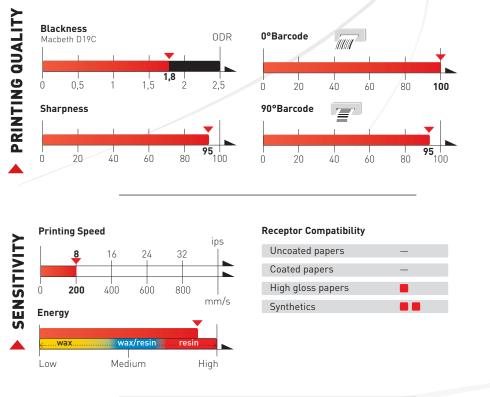

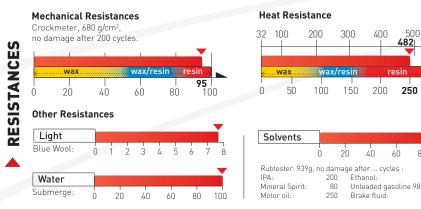

Evaluation of observed performances of the ribbon with optimized printer settings and receptors (ARMOR procedure).

MAKING

250 300 °C

80 100

THERMAL TRANSFER EASIER

80

10

10

# AXR® 8 SUPER PREMIUM - RESIN

FOR FLAT HEAD

# THERMAL TRANSFER RIBBONS

The characteristics of AXR® 8 answer the requirements of the following application fields:

# COLOR RANGE

For colors, please refer to the AXR $^{\otimes}7$ + color range.



(If your application is not among the ones below, please contact us.)

Retail labeling

Healthcare

Conveyor sorting

**EXAMPLES OF APPLICATION FIELDS** 



Laboratory

Outdoor applications





# **CERTIFICATIONS AND APPROVALS**

**Food contact:** This ribbon is compliant with the European Directive 1935/2004/EC.

**UL Approved:** Legibility and durability of the printed label.

**Heavy metals:** The ribbon is compliant with EC 95/638. SGS reports available upon request.

**RoHs/WEEE:** EC directives 2002/95 and 2002/96, compliance to the limitation of dangerous substances in electric and electronic equipments.

**REACH:** As a European manufacturer, ARMOR is completely fulfilling REACH requirements. Our ribbons are free from the Substances of Very High Concern (SVHC).

**TSCA:** The ribbon does not contain any substance of this list.

**CP65:** The ribbon is free from the substances listed except carbon black.

Contact us for all other regulations linked to product compliance with toxicity, treatment of wastes, banned components, packaging, etc.

# RIBBON SPECIFICATIONS

Signage & Logos

Livestock



**Backcoating:** Silicon based. Friction coefficient: Kd < 0.2.

#### PET film:


Thickness: 4.5 µm. Tearing resistance: > 300 N/mm²(MD).

Ink: Resin. Melting point: 85°C (ARMOR procedure).

#### Ribbon:

Thickness (black): < 8 µm. The ribbon is anti static build-up treated. Storage: 12 months, 5-35°C (40-95°F), 20-80 % Humidity Rate.

### SUSTAINABLE DEVELOPMENT




The film is produced in one of the industry's most organized and awarded factories:

#### **DECAPLAN:** Sustainable development action plan based on 10 leading topics involving all profiles of the company

**Global Compact:** UNO initiative inviting companies to apply fundamental ethical and environmental values.

#### Responsible Care:

International Council of Chemical Associations' charter towards constant improvements in health, safety and environment.



ISO 9001 : 2008, N°QUAL/2007/28312 ISO 14001 : 2004, N°ENV/2007/28315 OHSAS 18001 : 2007, N°SMS/2007/28316

#### AFAQ 1000NR (means millennium):

Evaluation of companies' state of advancement in sustainable development. ARMOR, 1st company to reach "Exemplary" level.

MAKING THERMAL TRANSFER EASIER





